

BEST WESTERN OPTIONS

BWH | Hotels
Endorsed Supplier
2024



Giullermo Negron

Leader, National Commercial Hospitality - West
Giullermo.negron@lixil.com
805.206.9053



PART OF **LIXIL**



LIXIL


LIXIL

LIXIL is the most comprehensive global company in the housing and building industry. We provide human-centric innovations that enhance people's living spaces. From sanitary fixtures and fittings to a full lineup of materials for houses and major architectural buildings, we bring together connected expertise, beautiful design, reliable quality, and a responsible approach to business.

Today, we are a global enterprise with over 60,000 employees worldwide. Whether for a modern office in a business complex, a family home, an airport, or a museum, our ambition is to create a good living by focusing on living technology that genuinely enhances our everyday lives.






Standard

	<p>SKU TU064507.002</p>	<p>TAG</p>	<p>COLOR Chrome (002)</p>
	<p>  </p>	<p>QTY 2</p>	
	<p>American Standard, Serin® 1.75 gpm/6.6 L/min Tub and Shower Trim Kit With Water-Saving 3-Function Shower Head, Double Ceramic Pressure Balance Cartridge With Lever Handle</p> <ul style="list-style-type: none"> • Includes One-Piece Cartridge: Simplifies installation and maintenance • Double Ceramic Pressure Balance Cartridge: Combination of Ceramic Disc Mixing Valve and a Ceramic Balancing Spool in a one-piece cartridge • Ceramic Disc Mixing Valve: Assures a lifetime of drip-free performance and smooth handle operation • Ceramic Balancing Spool: Maintains a constant output temperature in response to changes in relative hot and cold supply pressure. Ceramic material is unaffected by mineral deposits and harsh water conditions • Integrated Check Valves: Engineered to eliminate cross flow • Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding • Comfort Zone: Offers a wider shower range to fine tune the desired temperature within the useful temperature zone • Back-to-Back Capability: Hot and cold can be reversed quickly and easily • Water Saving: Saves 28% water usage • Water-saving 4-3/4" (120 mm) 3-function showerhead, 1.75 gpm/6.6 L/min maximum flow, Shower arm and flange, Metal wall escutcheon, Metal lever handle, For Use with Flash Shower Rough-In Valves <p>View Specification Sheet</p>		






	<p>SKU RU101SS</p>	<p>TAG</p>	<p>COLOR No Finish (007)</p>
		<p>QTY 1</p>	
	<p>American Standard, Flash® Shower Rough-In Valve With Universal Inlets/Outlets With Screwdriver Stops</p> <ul style="list-style-type: none"> • Flush Plug: Eliminates the need to remove cartridge during installation and allows installer to flush the lines without cross flow. Can be tested using flush plug with air (200 psi) or water (300 psi). • Stainless Steel Retaining Ring with Flats: Secures test cap/ cartridge in place and eliminates need for screws. Flats make it simple to loosen ring for quick, easy insertion/removal of test cap/cartridge. • Flat Back: Allows valve to be mounted flush against cross brace for easy and solid installation • Cast DZR Brass Valve Body: Resists corrosion due to high chloride and pH levels in water. • Back-to-Back Capability: Hot and cold can be reversed quickly and easily. • Exclusive Plaster Guard: Plaster guard is designed to protect valve and act as a guide during installation. It can serve as mounting support for thin-wall installations. • Wide Rough-in Range: From 1-3/4" to 2-3/4" from finished wall to the back of the valve. • 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters • Includes Screwdriver Stops for easy servicing at the valve • Cartridge Ships with Trim <p>View Specification Sheet</p>		

Standard



SKU 7075002.002	TAG	COLOR Chrome (002)
    	QTY 1	
<p>American Standard, Colony® PRO 4-Inch Centerset Single-Handle Bathroom Faucet 1.2 gpm/4.5 Lpm With Lever Handle</p> <ul style="list-style-type: none"> • Conserves water – Uses just 1.2 gpm/4.5 Lpm and features a pressure-compensating aerator • Durable design – Metal body and lever handle for reliability even with constant use • Drip-free dependability – Quality ceramic disc valve with adjustable hot limit safety stop to help prevent scalding • Supply hoses – Braided flexible hoses with compression connectors included • Red/Blue indicators – Visible markings to identify hot and cold • Includes – Pop-up drain <p>View Specification Sheet</p>		



SKU 2064131.002	TAG	COLOR Chrome (002)
    	QTY 2	
<p>American Standard, Serin® Single Hole Single-Handle Bathroom Faucet 1.2 gpm/4.5 L/min With Lever Handle</p> <ul style="list-style-type: none"> • Brass construction: Durable. Easy to clean. Ideal for prolonged contact with water • Ceramic disc valve cartridge: Assures a lifetime of smooth handle operation and drip-free performance • Lead free: Faucet contains equals or less than 0.25% total lead content by weighted average • Exclusive speed connect metal drain: Fewer parts. Installs in less time • Braided flexible supply hoses with 3/8" compression connectors • No adjustments required – seals the first time, every time • 20 inch (508 mm) flexible stainless steel cable – installs effortlessly in tight spaces • 1.2 gallons per minute (4.5 L/min) maximum flow rate helps to save water • Fitting can be mounted on 4" centers using optional escutcheon (2064.101P) or single hole mounting method • Choice of finishes: Available in Polished Chrome or Satin Nickel (PVD) <p>View Specification Sheet</p>		

Standard

SKU 32642003	TAG	COLOR Chrome (G00)
	QTY 1	






Grohe, Single Hole Single-Handle S-Size Bathroom Faucet, 1.2 GPM (4.5 L/min)





- **INCLUDES:** Nylon braided flex hoses and drain assembly
- **SINGLE-HOLE FAUCET:** Single-handle bathroom faucet can also be used on a 1- or 3-hole sink or vanity with deck plate, sold separately
- **ANGLED AERATOR:** Directs water flow outward toward hands for added ease and convenience
- **DRIP-FREE:** German engineered bathroom faucet with quality ceramic disc valve to ensure leak-proof performance
- **METAL CONSTRUCTION:** Durable metal spout and handle
- **SMOOTH HANDLE OPERATION:** Features GROHE SilkMove for precise handle control
- **LEAD-FREE SAFETY:** The Inner waterways of the GROHE Zero design prevent water from coming into contact with metal material
- **REDUCED SPLASHING:** GROHE AquaGuide allows for adjustable water flow for less splashing
- **CONSERVES WATER:** GROHE EcoJoy technology allows for less water usage without sacrificing performance
- **DURABLE FINISHES:** GROHE StarLight coating maintains luster on brushed and polished finishes, LIMITED LIFETIME WARRANTY: GROHE warranties this bathroom faucet to be free of manufacturer defects, your assurance of quality design and performance

[View Specification Sheet](#)

GOOD

	SKU TU617508.002	TAG	COLOR Polished Chrome (100)
		QTY 1	
	American Standard, Glenmere 1.8 gpm/6.8 L/min Tub and Shower Trim Kit With Water-Saving Showerhead, Double Ceramic Pressure Balance Cartridge With Lever Handle <ul style="list-style-type: none"> • Includes single-function showerhead and arm, pressure balance valve cartridge, and diverter tub spout • Pressure balance valve cartridge prevents accidental scalding and compensates for sudden changes in water pressure • 1.8 gpm flow rate helps conserve water without sacrificing performance • WaterSense certified • Limited lifetime warranty • Requires Flash Rough-in Valve, sold separately <p>View Specification Sheet</p>		

	SKU RU101SS	TAG	COLOR No Finish (007)
		QTY 1	
	American Standard, Flash® Shower Rough-In Valve With Universal Inlets/Outlets With Screwdriver Stops <ul style="list-style-type: none"> • Flush Plug: Eliminates the need to remove cartridge during installation and allows installer to flush the lines without cross flow. Can be tested using flush plug with air (200 psi) or water (300 psi). • Stainless Steel Retaining Ring with Flats: Secures test cap/ cartridge in place and eliminates need for screws. Flats make it simple to loosen ring for quick, easy insertion/removal of test cap/cartridge. • Flat Back: Allows valve to be mounted flush against cross brace for easy and solid installation • Cast DZR Brass Valve Body: Resists corrosion due to high chloride and pH levels in water. • Back-to-Back Capability: Hot and cold can be reversed quickly and easily. • Exclusive Plaster Guard: Plaster guard is designed to protect valve and act as a guide during installation. It can serve as mounting support for thin-wall installations. • Wide Rough-in Range: From 1-3/4" to 2-3/4" from finished wall to the back of the valve. • 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters • Includes Screwdriver Stops for easy servicing at the valve • Cartridge Ships with Trim <p>View Specification Sheet</p>		

	SKU 1024970000	TAG	COLOR Chrome (G00)
	  	QTY 1	
	Grohe, Eurosmart Pressure Balance Valve Tub/Shower Trim Kit <ul style="list-style-type: none"> • TUB/SHOWER COMBO: Includes a 4-spray shower head, shower arm, pressure balance valve trim with cartridge and tub spout. Requires GrohSafe 3.0 rough-in valve, sold separately. • TEMPESTA 100 SHOWER HEAD: Features a 4-in. spray face and four spray patterns that deliver consistent water distribution with GROHE DreamSpray technology. Equipped with GROHE EcoJoy, this shower head reduces water consumption without sacrificing performance and has a 1.75 gpm (6.6Lpm) maximum flow rate. • RELEXA 5-IN. SHOWER ARM: Scratch- and tarnish-resistant; 1/2-in. male threads • EUROSMART PRESSURE BALANCE VALVE TRIM: Durable metal handle and plate, with cartridge for convenient installation and concealed mounting for a clean look • EUROSMART DIVERTER TUB SPOUT: Easy slip-on installation <p>View Specification Sheet</p>		



GOOD

	SKU 35110000	TAG	COLOR No Finish (00G)
	QTY 1		

Grohe, Pressure Balance Rough-In Valve

- Flush plug allows valve body to be tested and flushed without the presence of the valve cartridge (ships with trim)
- Can be tested using flush plug with air (200 psi) or water (300 psi)
- Stainless steel retaining ring with flats secures flush plug and cartridge, eliminating the need for screws
- Flat back allows valve to be mounted flush against cross brace for easy and solid installation
- DZR cast brass body is durable, corrosion resistant and ideal for prolonged contact with water
- Back-to-back capability allowing hot and cold to be reversed quickly and easily
- Exclusive plaster guard is designed to protect valve and act as a guide during installation
- Plaster guard can serve as mounting support for thin-wall installations
- Wide rough-in range from 1-3/4 in. to 2-3/4 in. from finished wall to back of valve
- Includes service stops for easy servicing at the valve, Cartridge ships with trim


[View Specification Sheet](#)

	SKU 7612207.002	TAG	COLOR Polished Chrome (100)
		QTY 1	

American Standard, Crawford 4-Inch Centerset 2-Handle Bathroom Faucet 1.2 gpm/4.5 L/min With Lever Handles

- Convenient push-drain is easy to operate and install
- Ceramic disc valve ensures drip-free operation and smooth handle motion
- Metal spout and metal handles offer unmatched durability and long wear
- Limited lifetime warranty

[View Specification Sheet](#)



	SKU 20294003	TAG	COLOR Chrome (G00)
		QTY 1	


Grohe, 8-inch Widespread 2-Handle S-Size Bathroom Faucet, 1.2 GPM (4.5 L/min)

- GROHE SilkMove quality ceramic disc cartridge provides ultra-smooth handle motion to ensure precise control of water flow and temperature
- GROHE StarLight finish ensures a longer-lasting shine with built-in resistance to scratches, tarnishing, and buildup from daily use
- GROHE EcoJoy reduces water consumption by up to 50% without sacrificing performance
- GROHE Zero - inner waterways ensure lead-free and nickel-free safety
- GROHE AquaGuide adjustable water flow eliminates splashing
- QuickFix design requires fewer, less complicated parts for a hassle-free installation completed in half the time
- Nylon reinforced braided flexible inlet hoses offer easy installation and long-lasting durability
- Includes drain assembly
- Withstands water temperatures up to ~82°C (~180° F) for 30 minutes



[View Specification Sheet](#)



BETTER

	SKU 1024980000	TAG	COLOR Chrome (G00)
		QTY 1	
	<p>Grohe, Concetto Pressure Balance Valve Tub/Shower Trim Kit</p> <ul style="list-style-type: none"> • TUB/SHOWER COMBO: Includes a 4-spray shower head, shower arm, pressure balance valve trim with cartridge and tub spout. Requires GrohSafe 3.0 rough-in valve, sold separately. • TEMPESTA COSMOPOLITAN 100 SHOWER HEAD: Features a 4-in. spray face and four spray patterns that deliver consistent water distribution with GROHE DreamSpray technology. Equipped with GROHE EcoJoy, this shower head reduces water consumption without sacrificing performance and has a 1.75 gpm (6.6Lpm) maximum flow rate. • RELEXA 5-IN. SHOWER ARM: Scratch- and tarnish-resistant; ½-in. male threads • CONCETTO PRESSURE BALANCE VALVE TRIM: Durable metal handle and plate, with cartridge for convenient installation and concealed mounting for a clean look • CONCETTO DIVERTER TUB SPOUT: Easy slip-on installation <p>View Specification Sheet</p>		


	SKU RU101SS	TAG	COLOR No Finish (007)
		QTY 1	
	<p>American Standard, Flash® Shower Rough-In Valve With Universal Inlets/Outlets With Screwdriver Stops</p> <ul style="list-style-type: none"> • Flush Plug: Eliminates the need to remove cartridge during installation and allows installer to flush the lines without cross flow. Can be tested using flush plug with air (200 psi) or water (300 psi). • Stainless Steel Retaining Ring with Flats: Secures test cap/ cartridge in place and eliminates need for screws. Flats make it simple to loosen ring for quick, easy insertion/removal of test cap/cartridge. • Flat Back: Allows valve to be mounted flush against cross brace for easy and solid installation • Cast DZR Brass Valve Body: Resists corrosion due to high chloride and pH levels in water. • Back-to-Back Capability: Hot and cold can be reversed quickly and easily. • Exclusive Plaster Guard: Plaster guard is designed to protect valve and act as a guide during installation. It can serve as mounting support for thin-wall installations. • Wide Rough-in Range: From 1-3/4" to 2-3/4" from finished wall to the back of the valve. • 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters • Includes Screwdriver Stops for easy servicing at the valve • Cartridge Ships with Trim <p>View Specification Sheet</p>		

BETTER

	SKU TU018508.002	TAG	COLOR Chrome (002)
		QTY 1	
	<p>American Standard, Edgemere® 1.8 gpm/6.8 L/min Tub and Shower Trim Kit With Water-Saving Showerhead, Double Ceramic Pressure Balance Cartridge With Lever Handle</p> <ul style="list-style-type: none"> • Includes One-Piece Cartridge: Simplifies installation and maintenance • Double Ceramic Pressure Balance Cartridge: Combination of Ceramic Disc Mixing Valve and a Ceramic Balancing Spool in a one-piece cartridge • Ceramic Disc Mixing Valve: Assures a lifetime of drip-free performance and smooth handle operation • Ceramic Balancing Spool: Maintains a constant output temperature in response to changes in relative hot and cold supply pressure. Ceramic material is unaffected by mineral deposits and harsh water conditions • Integrated Check Valves: Engineered to eliminate cross flow • Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding • Comfort Zone: Offers a wider shower range to fine tune the desired temperature within the useful temperature zone • Back-to-Back Capability: Hot and cold can be reversed quickly and easily • Water Saving: Saves 28% water usage • Water-saving 5-3/4" (147 mm) showerhead, 1.8 gpm/6.8 L/min maximum flow, Shower arm and flange, Wall escutcheon, Metal lever handle, Metal slip-on diverter tub spout, For Use with Flash Shower Rough-In Valves <p>View Specification Sheet</p>		










	SKU 7018101.002	TAG	COLOR Chrome (002)
		QTY 1	
	<p>American Standard, Edgemere® Single Hole Single-Handle Bathroom Faucet 1.2 gpm/4.5 L/min With Lever Handle</p> <ul style="list-style-type: none"> • All metal construction • Metal 1-Handle Lever • Exclusive Speed Connect Drain for easy installation • Meets EPA WaterSense Criteria • ADA Compliant • 1.2 gallons per minute (4.5 liters per minutes) maximum flow rate to help conserve water • Single Hole Mounting • 24" (610 mm) braided flexible supply hose <p>View Specification Sheet</p>		

BETTER



<p>SKU 20572001</p>	<p>TAG</p>	<p>COLOR Chrome (G00)</p>
<p>  </p>		<p>QTY 1</p>
<p>Grohe, 8-inch Widespread 2-Handle S-Size Bathroom Faucet, 1.2 GPM (4.5 L/min)</p> <ul style="list-style-type: none"> • INCLUDES: Nylon braided flex hoses and drain assembly • THREE-HOLE FAUCET: Two-handle bathroom faucet is a sleek, contemporary style • DRIP-FREE: German engineered bathroom faucet with quality ceramic disc valve to ensure leak-proof performance • BRASS BODY: Durable brass spout and sturdy metal handles for durability • EASY TO INSTALL: For use on a 3-hole sink or vanity • SMOOTH HANDLE OPERATION: Features GROHE SilkMove for precise handle control • CONSERVES WATER: GROHE EcoJoy technology allows for less water usage without sacrificing performance • DURABLE FINISHES: GROHE StarLight coating maintains luster on brushed and polished finishes • LIMITED LIFETIME WARRANTY: GROHE warrants this bathroom faucet to be free of manufacturer defects, your assurance of quality design and performance <p>View Specification Sheet</p>		





BEST

	SKU 14472000	TAG	COLOR Chrome (G00)
		QTY 1	
	Grohe, Pressure Balance Valve Trim with Cartridge <ul style="list-style-type: none"> • Includes one-piece cartridge to simplify installation and maintenance • Double ceramic pressure balance cartridge features a ceramic disc mixing valve and a ceramic balancing spool • Ceramic disc mixing valve ensures a lifetime of drip-free performance and smooth handle operation • Ceramic balancing spool maintains a constant water temperature • Integrated check valves are engineered to eliminate cross flow • Adjustable hot limit safety stop reduces the risk of accidental scalding • Offers a wide comfort zone to fine tune to the desired temperature • For use with GrohSafe 3.0 rough-in valves, sold separately View Specification Sheet		
	SKU 35110000	TAG	COLOR No Finish (00G)
		QTY 1	
	Grohe, Pressure Balance Rough-In Valve <ul style="list-style-type: none"> • Flush plug allows valve body to be tested and flushed without the presence of the valve cartridge (ships with trim) • Can be tested using flush plug with air (200 psi) or water (300 psi) • Stainless steel retaining ring with flats secures flush plug and cartridge, eliminating the need for screws • Flat back allows valve to be mounted flush against cross brace for easy and solid installation • DZR cast brass body is durable, corrosion resistant and ideal for prolonged contact with water • Back-to-back capability allowing hot and cold to be reversed quickly and easily • Exclusive plaster guard is designed to protect valve and act as a guide during installation • Plaster guard can serve as mounting support for thin-wall installations • Wide rough-in range from 1-3/4 in. to 2-3/4 in. from finished wall to back of valve • Includes service stops for easy servicing at the valve, Cartridge ships with trim View Specification Sheet		
	SKU 2359200A	TAG	COLOR Chrome (G00)
	    	QTY 1	
	Grohe, Single Hole Single-Handle S-Size Bathroom Faucet, 1.2 GPM (4.5 L/min) <ul style="list-style-type: none"> • SINGLE-HOLE FAUCET: Single-handle bathroom faucet can also be used on a 1- or 3-hole sink or vanity with deck plate, sold separately • DRIP-FREE: German engineered bathroom faucet with quality ceramic disc valve to ensure leak-proof performance • BRASS BODY: Solid brass spout and metal handle for durability • SMOOTH HANDLE OPERATION: Features GROHE SilkMove for precise handle control • ANTI-SCALD PROTECTION: Limits the water temperature to prevent accidental scalding • CONSERVES WATER: GROHE EcoJoy technology allows for less water usage without sacrificing performance • DURABLE FINISHES: GROHE StarLight coating maintains luster on brushed and polished finishes View Specification Sheet		

BEST

	SKU 7455107.002	TAG	COLOR Chrome (002)
		QTY 2	
	<p>American Standard, Town Square® S Single Hole Single-Handle Bathroom Faucet 1.2 gpm/4.5 L/min With Lever Handle</p> <ul style="list-style-type: none"> • Cast Brass Spout • Braided Flexible Hoses with 3/8" Compression Connectors • Includes Push-Pop drain for ease of installation and use • Lead Free • Optional Escutcheon Plate available (2555.101P) • WaterSense Certified • CEC Compliant Product <p>View Specification Sheet</p>		

	SKU TU455508.002	TAG	COLOR Chrome (002)
		QTY 2	
	<p>American Standard, Town Square® S 1.75 gpm/6.8 L/min Tub and Shower Trim Kit With Water-Saving Showerhead, Double Ceramic Pressure Balance Cartridge With Lever Handle</p> <ul style="list-style-type: none"> • One-Piece Cartridge: Simplifies installation and maintenance • Double Ceramic Pressure Balance Cartridge: Combination of Ceramic Disc Mixing Valve and a Ceramic Balancing Spool in a one-piece cartridge • Ceramic Disc Mixing Valve: Assures a lifetime of drip-free performance and smooth handle operation • Ceramic Balancing Spool: Maintains a constant output temperature in response to changes in relative hot and cold supply pressure. Ceramic material is unaffected by mineral deposits and harsh water conditions • Integrated Check Valves: Engineered to eliminate cross flow • Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding • Comfort Zone: Offers a wider shower range to fine tune the desired temperature within the useful temperature zone • Back-to-Back Capability: Hot and cold can be reversed quickly and easily • Water Saving: Saves 28% water usage <p>View Specification Sheet</p>		

BEST

SKU RU101SS	TAG	COLOR No Finish (007)
QTY 1		




American Standard, Flash® Shower Rough-In Valve With Universal Inlets/Outlets With Screwdriver Stops

- Flush Plug: Eliminates the need to remove cartridge during installation and allows installer to flush the lines without cross flow. Can be tested using flush plug with air (200 psi) or water (300 psi).
- Stainless Steel Retaining Ring with Flats: Secures test cap/ cartridge in place and eliminates need for screws. Flats make it simple to loosen ring for quick, easy insertion/removal of test cap/cartridge.
- Flat Back: Allows valve to be mounted flush against cross brace for easy and solid installation
- Cast DZR Brass Valve Body: Resists corrosion due to high chloride and pH levels in water.
- Back-to-Back Capability: Hot and cold can be reversed quickly and easily.
- Exclusive Plaster Guard: Plaster guard is designed to protect valve and act as a guide during installation. It can serve as mounting support for thin-wall installations.
- Wide Rough-in Range: From 1-3/4" to 2-3/4" from finished wall to the back of the valve.
- 1/2" Male NPT/Sweat inlets/outlets accept 1/2" copper, 1 1/2" iron pipe, PEX or CPVC adapters
- Includes Screwdriver Stops for easy servicing at the valve
- Cartridge Ships with Trim

[View Specification Sheet](#)

ADA Shower






SKU TU064740.002	TAG	COLOR Chrome (002)
	QTY 1	
American Standard, Serin® 2-Handle Integrated Shower Diverter Trim Only <ul style="list-style-type: none"> • TRIM ONLY INCLUDED — Coordinates with the Serin Collection • METAL CONSTRUCTION — Plate and handles offer superior durability and performance • SMOOTH OPERATION — Sturdy handles offer smooth, precise movement • BEAUTIFUL FINISHES — Available in a choice of on-trend finishes • FLASH VALVE SOLD SEPARATELY — Requires Flash Rough-in Integrated Shower Diverter Valve RU521 with 2-outlet discrete capability or RU531 with 3-outlet discrete capability. Shared functionality also available with additional cartridge, sold separately <p>View Specification Sheet</p>		




SKU RU531	TAG	COLOR No Finish (007)
	QTY 1	
American Standard, Flash® 3-Way Integrated Shower Diverter Rough-In Valve with Pressure Balance Valve Cartridge <ul style="list-style-type: none"> • VERSATILE INSTALLATION — Compact body and flat back for easy and solid installation • 3-WAY DISCRETE FUNCTIONALITY — Provides the ability to alternate water flow among 3 separate outlets • OPTIONAL SHARED CAPABILITY - Provides the ability to share water flow simultaneously from any 2 outlets with the addition of shared cartridge, M970730-0070A, sold separately • 150° COMFORT RANGE — Provides a wider, more usable temperature range when fine-tuning water for the perfect shower • NO SOLDERING REQUIRED — Solid brass inlet connections for fast installation without adaptors, reducing leak points • QUALITY PRESSURE BALANCE VALVE — Double ceramic technology ensures faster adjustment to changes in water pressure to eliminate scalding, and a guarantee of drip-free performance for life • EXCLUSIVE PLASTER GUARD — Protects valve and acts as a guide during installation; can serve as mounting support for thin-wall installations • SELF-ALIGNING SCREW HOLES — Screw holes are easy to find; simplifies reattaching plaster guard to valve body • EASY SERVICING — Screwdriver stops for servicing at the valve • COMPATIBLE TRIMS — Designed for use with select American Standard trims: Town Square S, Townsend, Studio S, Delancey, Serin and Times Square <p>View Specification Sheet</p>		




SKU 1660652.002	TAG	COLOR Chrome (002)
  	QTY 1	
American Standard, 3-Function 4-3/4-Inch 1.8 gpm/6.8 L/min Water-Saving Showerhead <ul style="list-style-type: none"> • 4-3/4" diameter easy clean showerhead • Adjusts from Gentle Rain to Hard Rain to Massage • Pressure compensating flow control device • Showerhead only • 30 Percent water savings • 1.75 gpm/6.6 L/min flow restrictor <p>View Specification Sheet</p>		

ADA Shower



	SKU 1660240.002	TAG	COLOR Chrome (002)
	QTY 1		
	<p>American Standard, 5-Inch Wall Mount Standard Showerhead Arm</p> <ul style="list-style-type: none"> • Fits virtually all showerheads • Available in a variety of durable finishes • 2.5 gpm/9.5L/min. flow restrictor. • Fits virtually all showerheads • Available in other finishes matching your other fittings <p>View Specification Sheet</p>		


	SKU 8888421.002	TAG	COLOR Chrome (002)
	QTY 1		
	<p>American Standard, Serin® 6-3/4-Inch Brass Tub Spout</p> <ul style="list-style-type: none"> • 6-3/4" length to center of stream straightener • Brass construction • 1/2" IPS Connection <p>View Specification Sheet</p>		

	SKU 1660730.002	TAG	COLOR Chrome (002)
		QTY 1	
	<p>American Standard, Round 30-Inch Shower Slide Bar</p> <ul style="list-style-type: none"> • Adjustable shower holder • Adjustable bracket for personal showers • Slide bars for hands free showering • Adjustable setting for any height • Available in four different finishes <p>View Specification Sheet</p>		

	SKU 8888035.002	TAG	COLOR Chrome (002)
	QTY 1		
	<p>American Standard, Metal Shower Hose</p> <ul style="list-style-type: none"> • Compatible with all personal showers • Limited Lifetime Warranty – Function & Finish • Not recommended to be used as an extension hose • Not recommended to be use as an extension hose <p>View Specification Sheet</p>		

ADA Shower

	SKU 1660766.002	TAG	COLOR Chrome (002)
		QTY 1	
	<p>American Standard, 1.5 gpm/5.7 Lpf 3-Function Hand Shower With Pause Feature</p> <ul style="list-style-type: none"> • Pause feature: Non-positive shut-off button on handle reduces flow to a trickle to meet ADA requirement • Pressure-compensating flow control device • Easy clean spray nozzles: Allows for easy cleaning of lime and calcium build up • Includes check valve • 1.5 gpm/5.7 Lpm maximum flow rate <p>View Specification Sheet</p>		

	SKU 8888037.002	TAG	COLOR Chrome (002)
		QTY 1	
	<p>American Standard, Wall Supply</p> <ul style="list-style-type: none"> • Durable cast brass construction – Excellent for high use applications with prolonged water use • Standard 1/2-inch threaded connection • Includes check valve • Limited lifetime warranty on function and finish • Includes Check Valve • (1500mm) shower hose; a FloWise Water Saving hand shower; and a 25" slide bar. • Hand shower uses 40% less water than standard 2.5gpm hand showers. • Hand shower rated at 1.5gpm/5.7L/min. maximum flow rate. <p>View Specification Sheet</p>		

Accessories Blend

	SKU 7617210.002	TAG	COLOR Chrome (002)
	QTY 1		
	American Standard, Glenmere Robe Hook <ul style="list-style-type: none"> • Easy to install - No exposed screws for a seamless look • Perfect accent - Coordinates with the Glenmere Collection of faucets • Durable - All metal construction 		
	SKU 7617024.002	TAG	COLOR Chrome (002)
	QTY 1		
	American Standard, Glenmere 24-inch Towel Bar <ul style="list-style-type: none"> • Easy to install - No exposed screws for a seamless look • Perfect accent - Coordinates with the Glenmere Collection of faucets • Durable - All metal construction 		
	SKU 7353224.002	TAG	COLOR Chrome (002)
	QTY 1		
	American Standard, Townsend® 24-Inch Double Towel Bar <ul style="list-style-type: none"> • Metal construction for durability and long life • Limited lifetime warranty View Specification Sheet		
	SKU 40623001	TAG	COLOR Chrome (G00)
	QTY 1		
	Grohe, Spare Paper Holder <ul style="list-style-type: none"> • Made of metal for strength and lasting durability • Easy to install with no visible screws for a premium look View Specification Sheet		

Accessories Blend



SKU	TAG	COLOR
40364001		Chrome (G00)
	QTY	
	1	

Grohe, Robe Hook

- GROHE StarLight finish for scratch and tarnish-resistant surfaces for a lifetime of beauty



[View Specification Sheet](#)






Luxury Rooms





SKU D35120780.100	TAG	COLOR Polished Chrome (100)
CEC	QTY 1	
<p>DXV, DXV Modulus® Personal Hand Shower Set with Adjustable 24 in. Slide Bar</p> <ul style="list-style-type: none"> • From the DXV Modulus Collection - Modern Movement • Single function hand shower use up to 28% less water; 1.8 gpm (6.8 L/min) maximum flow rate • Hand shower bracket adjusts for height and angle • Durable 24-inch slide bar • 5-foot decorative metal hose • CEC/Cal Green Compliant • WaterSense® certified for high performance and water efficiency <p>View Specification Sheet</p>		



Public Space

	SKU 7770100.002	TAG	COLOR Chrome (002)
		QTY 1	
	<p>American Standard, Touchless Sensor-Operated Foam Soap Dispenser, Battery Powered</p> <ul style="list-style-type: none"> • CONTEMPORARY DESIGN — Sleek profile enhances every bathroom décor and complements American Standard touchless faucets • SOAP COMPATIBILITY — Uses any brand of foam soap that meets viscosity requirements; no custom soaps needed • LUXURIOUS FOAM SOAP — Air infused foam soap generator with 4 adjustable foam volume settings • EASY TO REFILL — 1.8L soap bottle with quick release button for convenient removal to fill and replace • DURABLE CONSTRUCTION — Brass body and shank ensure long-lasting performance • POWER OPTIONS — Battery-powered option includes 4 D-sized alkaline batteries; the AC option uses the existing American Standard plug-in or hard-wired power supplies, sold separately. One AC power kit can power the faucet and soap dispenser <p>View Specification Sheet</p>		



	SKU 7755105.002	TAG	COLOR Chrome (002)
	   	QTY 1	
	<p>American Standard, NextGen Selectronic® Touchless Faucet, Battery-Powered, 0.5 gpm/1.9 Lpm</p> <ul style="list-style-type: none"> • HANDS-FREE OPERATION: Touchless technology helps to limit the spread of germs and provides a cleaner environment • ELECTRONICS IN THE SPOUT: This integrated design locates the sensor, battery and solenoid valve in spout, eliminating the need for a control box below deck • COMES WITH LONG-LIFE BATTERY: Includes a 5-yr. CR-P2 lithium battery installed in faucet • EASY INSTALLATION AND MAINTENANCE: Faucet installs from the top, all serviceable parts are easily accessible • AUTO SHUT-OFF AND PURGE: Safety timer automatically turns water off after 55 seconds and periodically purges stagnant water • FLOW RATE: Single inlet dispenses cold or tempered water at the rate of VR 0.5 GPM/1.9 LPM pressure-compensating multi-laminar spray • OPTIONAL DECK PLATE: For 4 in. (102 mm) or 8 in. (203 mm) centers available, sold separately <p>View Specification Sheet</p>		



Public Space

	SKU 6245013.002	TAG	COLOR Chrome (002)
		QTY 1	
	<p>American Standard, Ultima® Selectronic® Exposed Urinal Flush Valve, Diaphragm Type, Battery, 0.125 gpf/0.5 Lpf</p> <ul style="list-style-type: none"> • For urinals with 3/4" (19 mm) exposed top spud • Includes CR-P2 lithium battery with 4 year life (assuming 4,000 uses per month) • Automatic touchless operation limits the spread of germs for a safer restroom • Exclusive DynaClean® self-cleaning wiper spring technology • Integral wiper spring cleans refill orifice with every flush to help prevent valve run-on • EvoLast® premium chlorine- and chloramine-resistant diaphragm material resists premature deterioration and failure • Fully mechanical manual override button can flush the valve without power • Proprietary brass alloy resists dezincification • Detection range can be adjusted manually or with optional remote control • Adjustable tailpiece for rough-in flexibility. Can be installed left- or right-handed <p>View Specification Sheet</p>		

	SKU 6590001.020	TAG	COLOR White (020)
		QTY 1	
	<p>American Standard, Washbrook® 0.125 – 1.0 gpf (0.47 – 3.8 Lpf) Top Spud Urinal</p> <ul style="list-style-type: none"> • High Efficiency Urinal (HEU) operates in the range of 0.125 gpf – 1.0 gpf (0.47 Lpf – 3.8 Lpf) • Flushing rim • Elongated 14" (356 mm) rim from finished wall • Powerful washdown action • Extended sides for privacy • 3/4" (19 mm) inlet spud with 2" (51 mm) threaded outlet connection • Two wall hangers included • Fixture only • Chrome plated non-metallic strainer included • Vitreous china, Meets ANSI flush requirements at 0.125 to 1.0 GPF, Sustainability CEC Listed. CALGreen Compliant <p>View Specification Sheet</p>		

Public Space


	SKU 6247121.002	TAG	COLOR Chrome (002)
			QTY 1
	<p>American Standard, Ultima® Selectronic® Exposed Toilet Flush Valve, Diaphragm Type, Battery, 1.28 gpf/4.8 Lpf</p> <ul style="list-style-type: none"> • For flushometer bowls with 1-1/2" (38 mm) exposed top spud • Includes CR-P2 lithium battery with 4 year life (assuming 4,000 uses per month) • Automatic touchless operation limits the spread of germs for a safer restroom • Exclusive DynaClean® self-cleaning wiper spring technology • Integral wiper spring cleans refill orifice with every flush to help prevent valve run-on • EvoLast® premium chlorine- and chloramine-resistant diaphragm material resists premature deterioration and failure • Fully mechanical manual override button can flush the valve without power • Proprietary brass alloy resists dezincification • Detection range can be adjusted manually or with optional remote control • Adjustable tailpiece for rough-in flexibility. Can be installed left- or right-handed <p>View Specification Sheet</p>		

	SKU 7025103.002	TAG	COLOR Chrome (002)
			QTY 1
	<p>American Standard, Paradigm® Selectronic® Touchless Faucet, Battery-Powered, 0.35 gpm/1.3 Lpm</p> <ul style="list-style-type: none"> • 5-Year CR-P2 lithium battery installed in faucet • Touchless operation limits the spread of germs • Single inlet for cold or tempered water • Clean, integrated design. No control box below deck • Easy installation and maintenance: Faucet installs from the top. All serviceable parts are easily accessible • Auto Purge: Periodically purges stagnant water • Safety Timer: Automatically turns water off after 55 seconds • Vandal-resistant 0.35 gpm/1.3 Lpm pressure-compensating multi-laminar spray • Optional deck plate for 4-inch (102 mm) or 8-inch (203 mm) centers available • Lead-Free: Faucet contains = 0.25% total lead content by weighted average <p>View Specification Sheet</p>		

Introducing LIXILPRO.com

Unlock the power of efficiency and innovation

LIXILPRO.com is the ultimate platform designed specifically for professionals in the construction field. Whether you're an architect, builder, or maintenance expert, LIXILPRO.com offers a comprehensive suite of resources to streamline every aspect of your work. Accessible, intuitive, and tailored to your needs - it's the go to solution for professionals shaping the future of commercial projects.

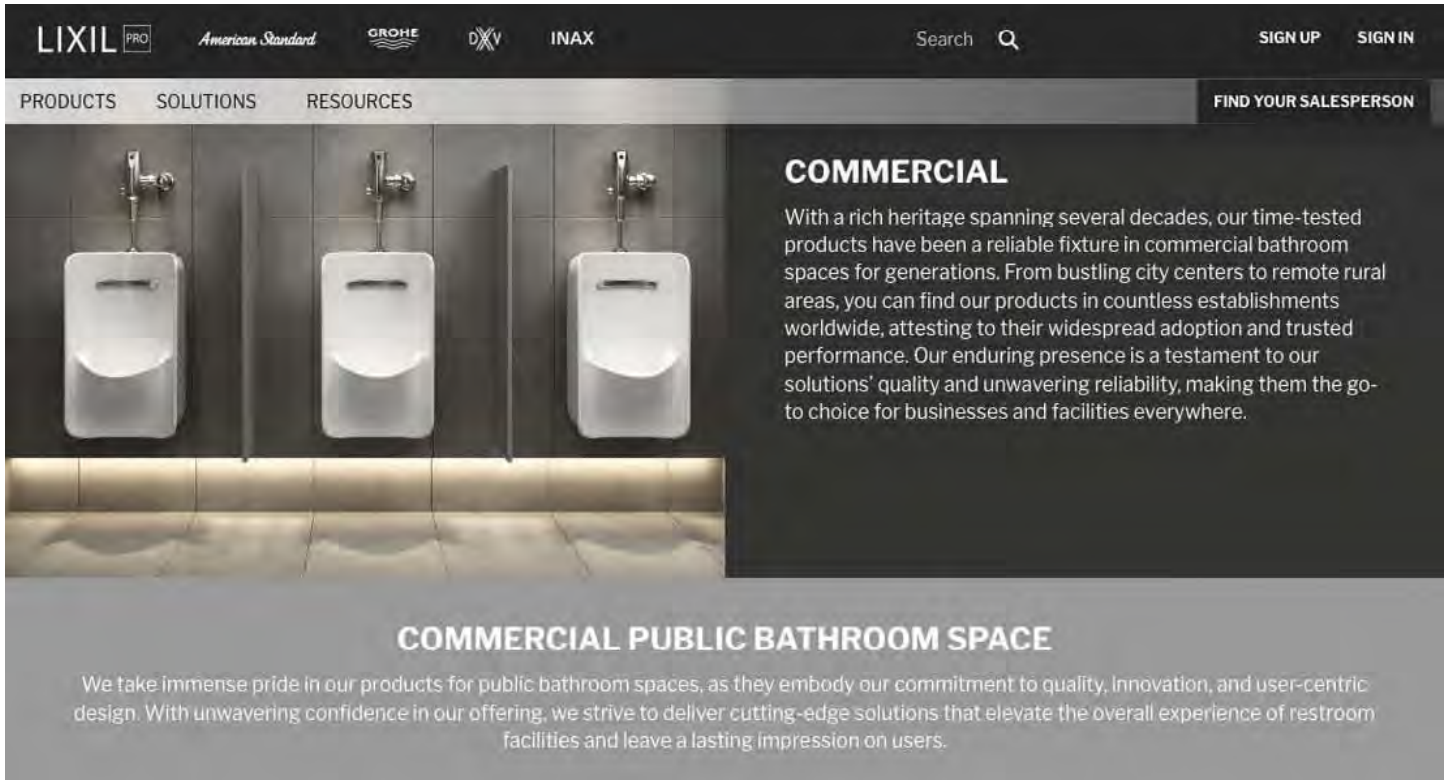

The screenshot shows the LIXILPRO.com website. At the top, there are logos for LIXIL PRO, American Standard, GROHE, DXV, and INAX. A search bar and 'SIGN UP' / 'SIGN IN' links are also present. Below the navigation bar, there are tabs for 'PRODUCTS', 'SOLUTIONS', and 'RESOURCES', along with a 'FIND YOUR SALESPERSON' button. The main content area features a large image of three white urinals in a public bathroom. To the right of the image, the heading 'COMMERCIAL' is followed by a paragraph of text. Below the image, the heading 'COMMERCIAL PUBLIC BATHROOM SPACE' is followed by another paragraph of text.

COMMERCIAL

With a rich heritage spanning several decades, our time-tested products have been a reliable fixture in commercial bathroom spaces for generations. From bustling city centers to remote rural areas, you can find our products in countless establishments worldwide, attesting to their widespread adoption and trusted performance. Our enduring presence is a testament to our solutions' quality and unwavering reliability, making them the go-to choice for businesses and facilities everywhere.

COMMERCIAL PUBLIC BATHROOM SPACE

We take immense pride in our products for public bathroom spaces, as they embody our commitment to quality, innovation, and user-centric design. With unwavering confidence in our offering, we strive to deliver cutting-edge solutions that elevate the overall experience of restroom facilities and leave a lasting impression on users.

REVIT, Specs, CAD and BIM Availability

Through our partner ATS, American Standard Brands provides a complete plumbing specification solution for your Revit and 3D projects. With over 8,500 product combinations accessible for immediate download and new files being added daily, ATS is the largest source for Revit plumbing equipment. ATS and American Standard's combined 3D BIM families can be easily accessed and downloaded at no-cost to the specification design community. For more information, please visit our partner website, www.atsspec.net.



For American Standard Customer Care

Call 1-800-442-1902 – Monday – Friday, 8:00 am – 7:00 pm EST

Visit www.americanstandard.com

Front Cover: Madera Chair Height EverClean® Toilet System With Touchless Selectronic® Piston Flush Valve, 1.6 gpf/6.0 Lpf (3461660.020), Commercial Heavy Duty Open Front Elongated Seat (5901100.020), Pintbrook® Urinal System With Touchless Selectronic® Piston Flush Valve, 0.5 gpf/1.9 Lpf (6002505.020), Ovalyn Under Counter Sink (0495221.020), and NextGen SElectronic Touchless Faucet, Battery Powered With SmarTherm Safety Shut-Off + ADM 0.5gpm/ 1.9Lpm (7755305.002)

Prices listed in this document are subject to change without notice. American Standard reserves the right to discontinue, alter, modify, or redesign products without liability.